久 尹 股 份 有 限 公 司　JOYIN CO., LTD.

Electrical Characteristics


Type No.	Maximum Allowable Voltage		Varistor Voltage V /1mA		Maximum Clamping Voltage	Withstanding Surge Current		Rated Wattage	Energy 10/1000us	Certification
	ACrms (V)	DC (V)	(V)	Tolerance	V@10A (V)	1 Time (A)	2 Times (A)	(W)	(J)	
7N471K	300	385	470	±10%	775	1200	600	0.25	35.0	☆ ★ ★

※The clamping voltage from 080P to 680K are tested at current 2.5A.

Material of coating : Epoxy powder
Color of coating : Yellowish brown
Storage condition→ Temperature: -40℃~125℃/ Humidity : 75%RH max. Status
Operation temperature range(18V~150V) : -40 to 85 ℃
Operation temperature range(180V~1800V) : -40 to 85 ℃

Lead style :

- ■ **P : Straight type**
- □ **Y : Kink type**
- □ **I : Inside kink type**
- □ **E : Outside kink type**

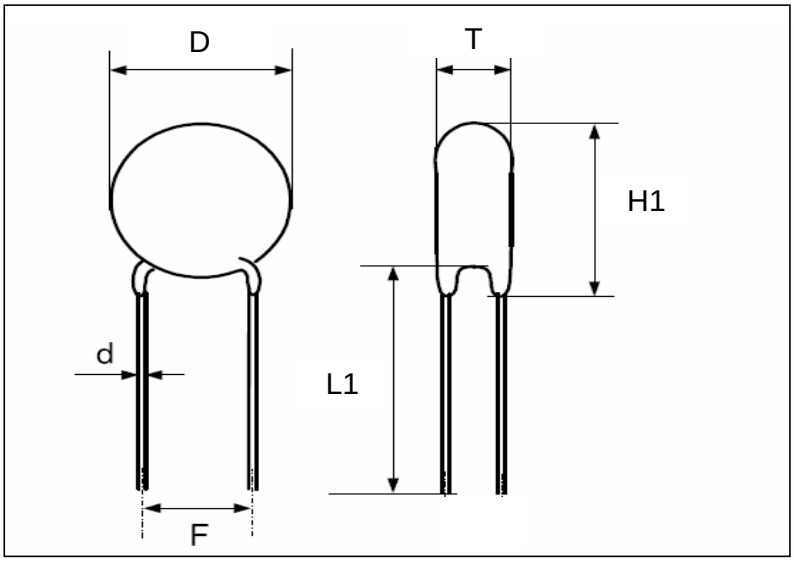

DIMENSION : **(Unit : mm)**

Type No.	D max.	T max.	L1 min	F±1.0	d±0.05	H1 max
7N471K	9.0	6.4	25.0	5.0	0.6	12.5