


ACCORD CO., LTD.

GENERAL SPECIFICATION


- Contact rating : 20mA, 24VDC
- LED Forward Current : 240mA
- LED Contact rating : Vmax=3.8V,Vnom=3.3V
- Contact resistance : 200 ohm max
- Life : 2,000,000 cycles per key
- Operating Temperature : -20°C to +60°C
- Storage Temperature : -40°C to +65°C

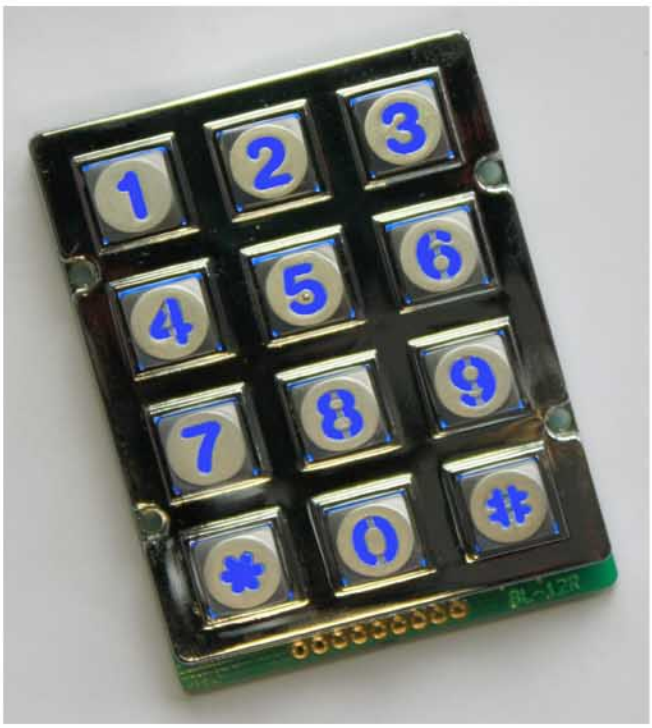

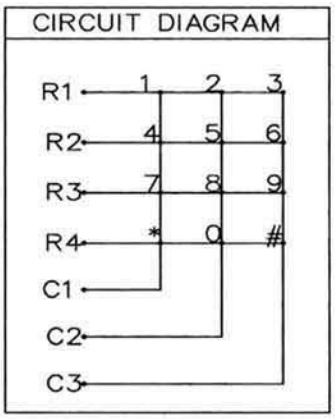

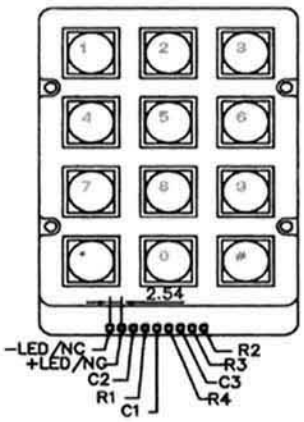

AK-207-N-SSL-WP-MM-BL

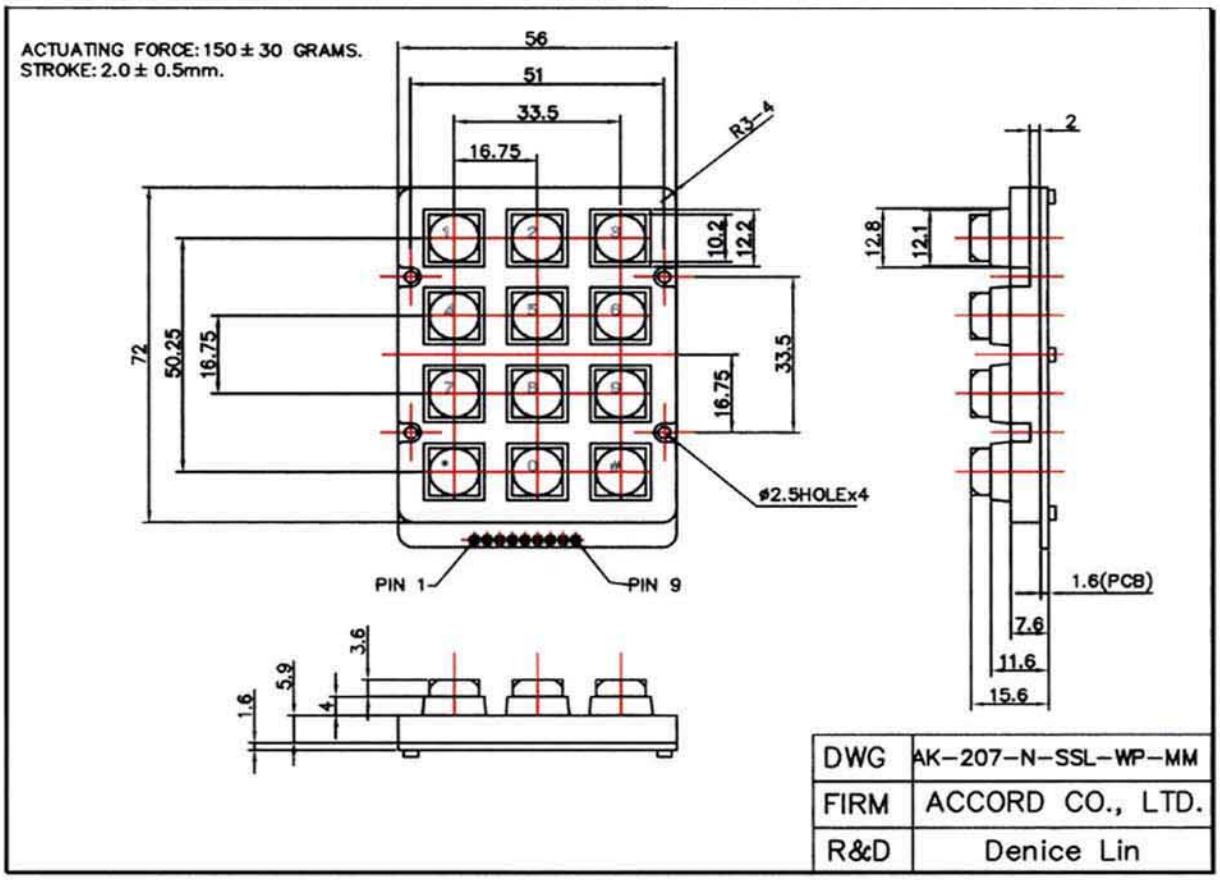

ACCORD CO., LTD.
8th Fl., No. 398, Jen Ai Road, Sec 4. Taipei. Taiwan.
Tel : 886-2-2704-4503
Fax : 886-2-2703-6358
E-mail : accordia@ms4.hinet.net
http://www.accordia.com.tw