
SPECIFICATIONS

CONTACT: Mechanical contact
CIRCUIT: SPST
RATING: DC 12V 50mA
TRAVEL: 0.3±0.15 mm
OPERATING FORCE: 160±50gf
260±50gf
CONTACT RESISTANCE: 100mΩmax.
LIFE: 100,000 cycles min.

DTS-62N






DTS-66	13.0[.512]	0.6 MAX [.0236 MAX]
DTS-65	9.5 [.374]	
DTS-63	7.0 [.275]	
DTS-62	5.0 [.197]	
DTS-61	4.3 [.169]	0.5 MAX [.0197 MAX]
PROD. NO.	H	I


DTS-24N




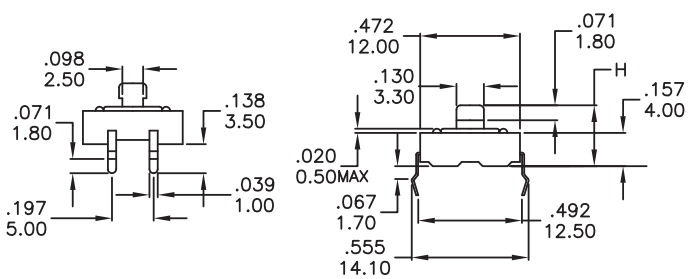

DTS-25	8.50 [.335]
DTS-24	7.30 [.287]
DTS-21	4.30 [.169]
PROD. NO.	H

DTS-21N




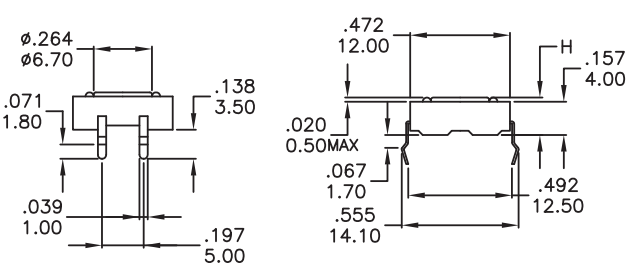

DTS-25	8.50 [.335]
DTS-24	7.30 [.287]
DTS-21	4.30 [.169]
PROD. NO.	H

DTSA-61N




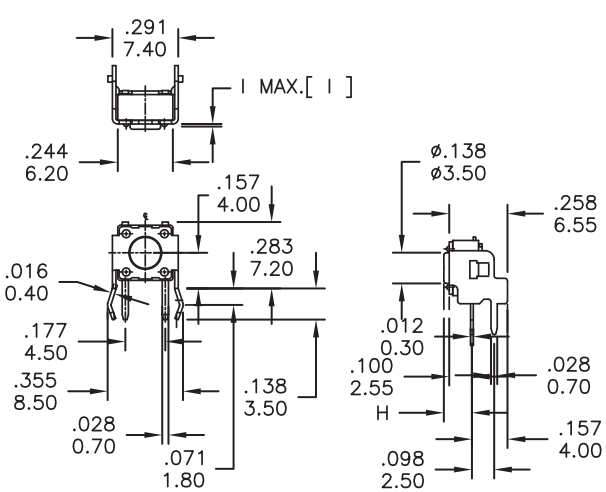

DTS-66	11.85 [.467]	0.4MAX[.016MAX]
DTS-65	8.35 [.329]	
DTS-63	5.85 [.230]	
DTS-62	3.85 [.152]	
DTS-61	3.15 [.124]	0.3MAX[.012MAX]
PROD. NO.	H	I

We have invented the rules
www.dailywell.com.tw



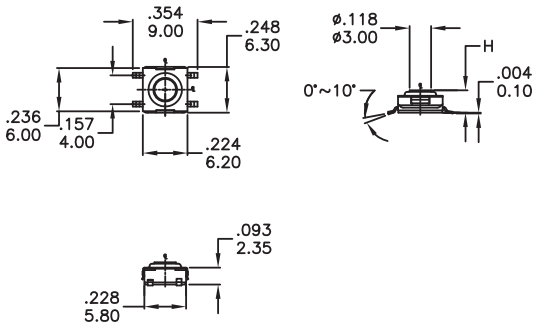


CONTACT: Stinless Steel.
CIRCUIT DISC: Phosphor brpnze with Silver cladding.
RATING: Brass with silver cladding.
BASE: UL94V-0 PPA Hing-Temp. Thermoplastic

DTSMW-69	3.80[1.50]
DTSMW-68	2.30[.091]
DTSMW-67	5.20[.205]
DTSMW-66	3.10[.120]
DTSMW-65	3.50[.138]
DTSMW-64	4.50[.177]
PROD. NO.	H


DTSMW-66




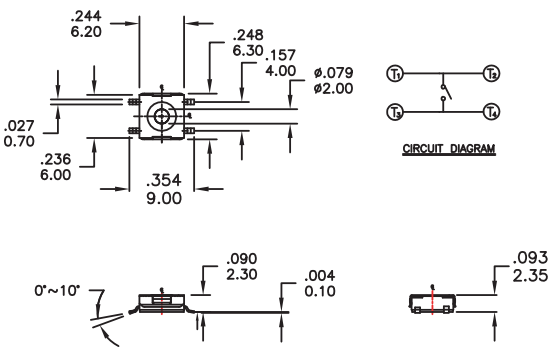

OPERATING FORCE		STEM COLOR
N	160gf	Brown
S	160gf	Silver
R	260gf	Red


DTSMW-68




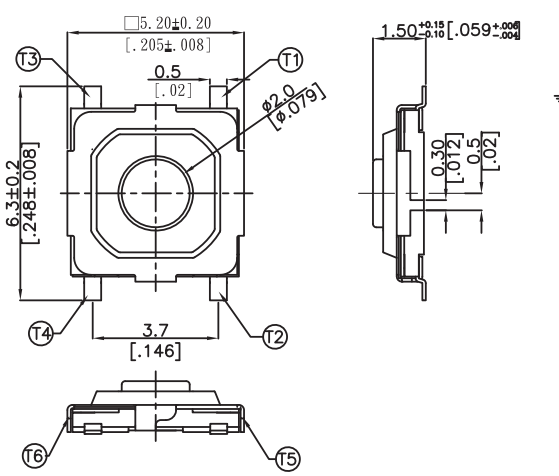

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS. BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.

TMG-533-V



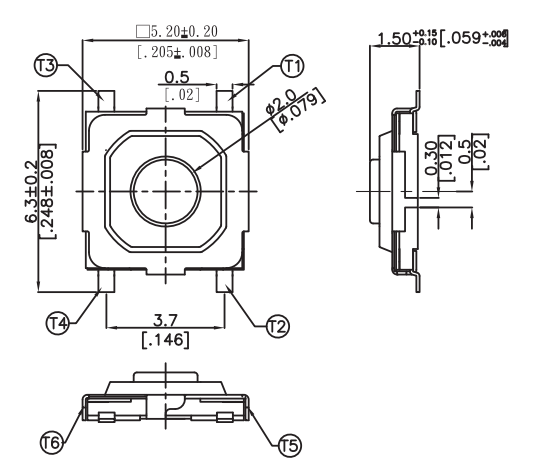

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS. BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.

TMG-523-V