


ALWAYS
RoHS compliant


PTF76FH232-G14





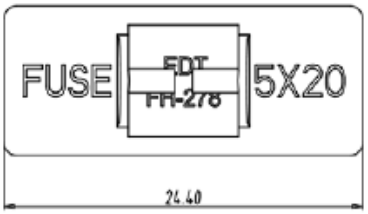



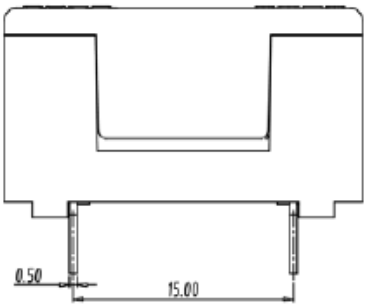

■ 图示(Pic. shown)： **PTF76BS232-G14**

General.

Fuse Type	Rated : 250V,6.3A 1.6W
Pin pitch : 15.00mm	
Orientation: 90°(Fuse holder insertion direction to board)	
Screw clamp unit: --	

认证（Approval）：

■ 技术参数Technical Data	UL standard			IEC standard		
◆ Fuse Type						
RATING	250V, 10A			250V, 6.3A 1.6W		
◆TERMINAL BLOCK						
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	--	--	--	--	--	--
额定电流(Rated current)	--	--	--	--	--	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy ，Tin plated					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2000V					
额定冲击电压(Rated surge voltage)	--					
保险丝规格(Fuse Type)	∅5.0*20					
接地螺丝(Grounding Screw)，扭矩(torque)	--					
剥线长度(Wire stripping length)	--					
使用温度(Operating temperature)	-40°C up to +105°C (UL) / -40°C up to +85°C (IEC)					